
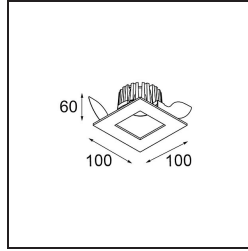


Date
Customer
Project
Type

Slide Recessed 1x IP55 LED 2700K Medium DE Donkey Grey Structure - Black Matt

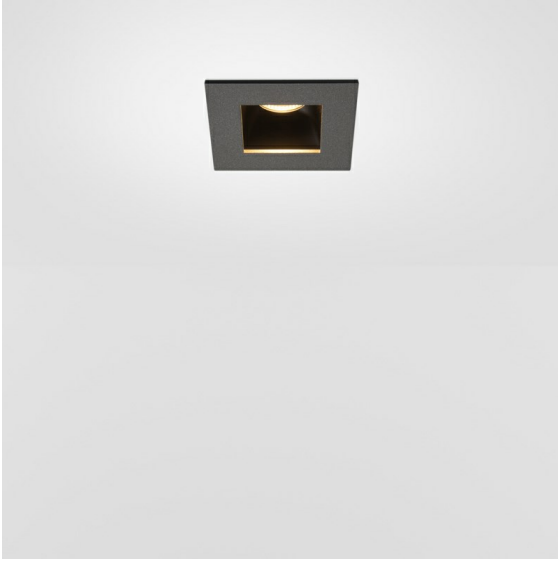


Specifications

Material	10486174
Light Source Type	LED
LED Type	BRIDGELUX V8G8
LED technology	LED COB
CRI	Min. 90
Colour Temperature	2700K
Lifetime	L80B20 @50,000 Hours
Lamp Included	Yes
Number of Light Sources	1
CIE flux code	99 100 100 100 59
Binning (SDCM)	2
Light Direction	Down
Optic	Reflector
Measured beam angle (°)	23.0
Input Voltage	Constant Current Driver Required
Electrical Class	III
IP Rating	55
Glow wire rating (°C)	960
Indoor/Outdoor	Indoor
Application	Ceiling
Mounting	Recessed
Cut-out size (mm)	ø92
Mounting depth (mm)	75.0
Adjustability	Not Applicable
Distance to Lighted Object (m)	0,1
Primary Colour & Primary Finish	Donkey Grey, Structure
Secondary Colour & Secondary Finish	Black, Matt
Gross weight (g)	295.0
Drive current (mA)	350 500
Min. forward voltage (Vf)	13,2 13,7
Max. forward voltage (Vf)	15,0 15,4
Connected load (W)	5,0 7,2
Delivered lumens (lm)	378 513
Efficacy (lm/W)	76 71
Glare rating	6 7


Slide is one of our Modular icons. Its name refers to the light gliding out from the luminaire, channelled by the stunning inner body, and creating a soft and smooth lighting experience. Slide owes its popularity to its deep-recessed light source. It is available in the Modular donkey grey structure with a black inner body or in an entirely white structure variant.




TM30 & CRI diagram

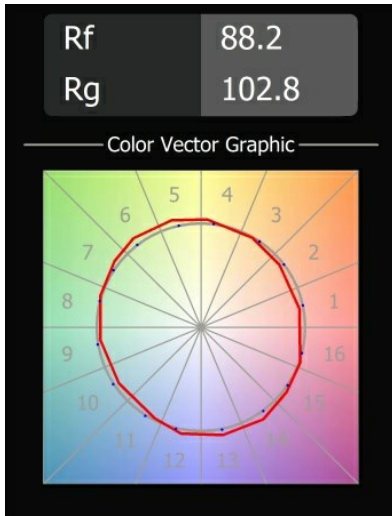


Light distribution & beam diagram

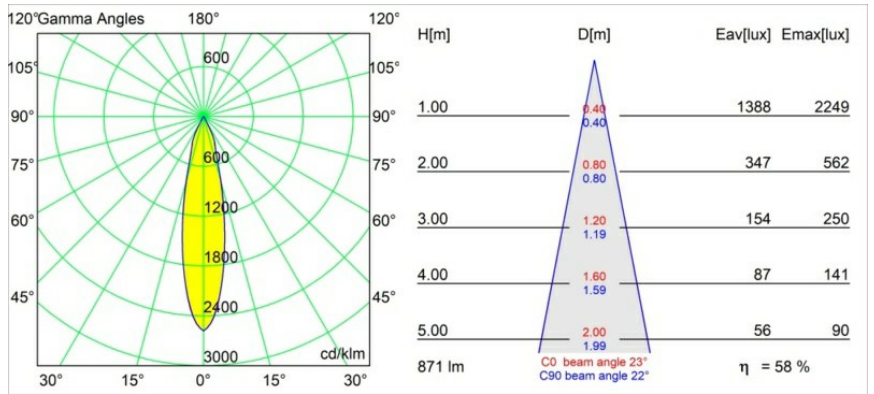

Installation Accessories

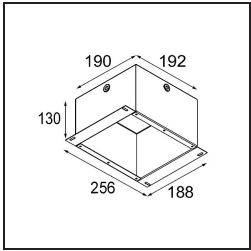

10889830 Conbox 192x190x130



12290330 Gypkit 190X190 - Ø92

Choose a required accessory