

FLOS

F1367009 White

Smithfield Suspension Pro

Designed by Jasper Morrison, 2009



45W - 2791lm - 2700K - CRI> 95

Suspension lamp with direct light. Aluminium body. Available in gloss black, matt black, red, green, white or MUD. Injection-moulded opalescent methacrylate diffuser. Steel ceiling attachment with steel suspension cable, 5 pole electric cable in PTFE double insulation, working length 2700mm.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications


EAN	8059607014950
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	45
System flux (lm)	2791

Physical

Colour	White
Length (mm)	600
Cord length (mm)	2700
Canopy dimension (mm)	36
Canopy width (mm)	146
Net weight (kg)	5.8
Package height (mm)	310
Package width (mm)	710
Package length (mm)	710
Package volume (m3)	0.16
IP internal	20

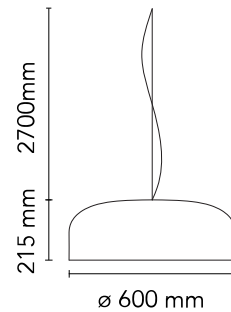

Download

[Mounting instructions](#)  PDF

[Spare Parts](#)  PDF

Photometric Files

[LDT / IES](#)  LDT


Technical Drawings

[3D](#)  ZIP

[Bim](#)  ZIP



Schematic light drawing



Luminous flux Luminaire
2623 lm

Photometric


Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2700
CRI>	95

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	200-240
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimming type	Dimmable Push
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Spare Parts

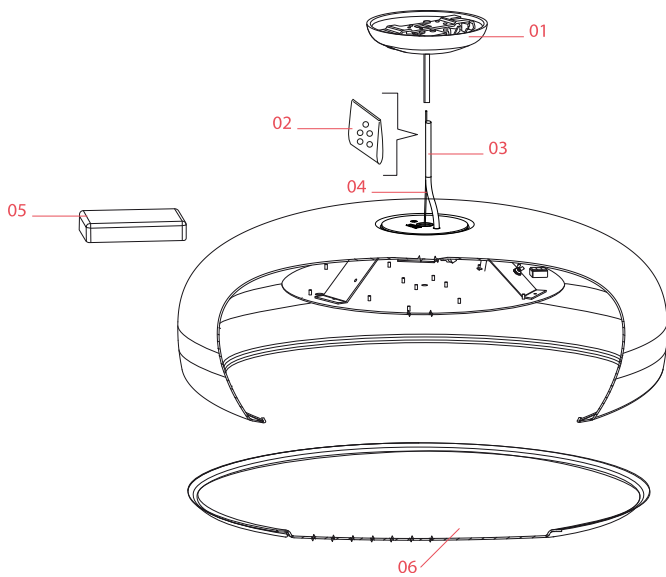

- | | | |
|-----|--|-----------|
| 01. | White rose assembly | RA3690209 |
| 02. | Kit of 5 or rings | RF05382 |
| 03. | 2,7mt fep/pvc 5x0,75 transparent cable | RF29934 |
| 04. | 3 mt steel cable ø1,2 with 19 winded wires | RF29665 |
| 05. | Driver 60W 500-1400mA 200-240V | RF31674 |
| 06. | Methacrylate diffuser | RF19022 |

DOWNLOAD

RF29934

2,7mt fep/pvc 5x0,75 transparent cable



RA3690209

White rose assembly

RF05382

Kit of 5 or rings

RF29665

3 mt steel cable \varnothing 1,2 with 19
winded wires



RF31674

Driver 60W 500-1400mA 200-
240V

RF19022

Methacrylate diffuser